



# LED WATERPROOF LAMP

Product Code: 059 004 0045


IRMAK-45



## Technical Drawing

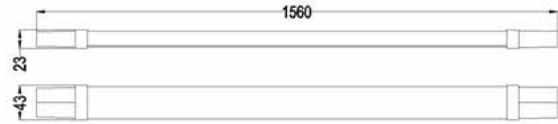

## Photometric Diagram

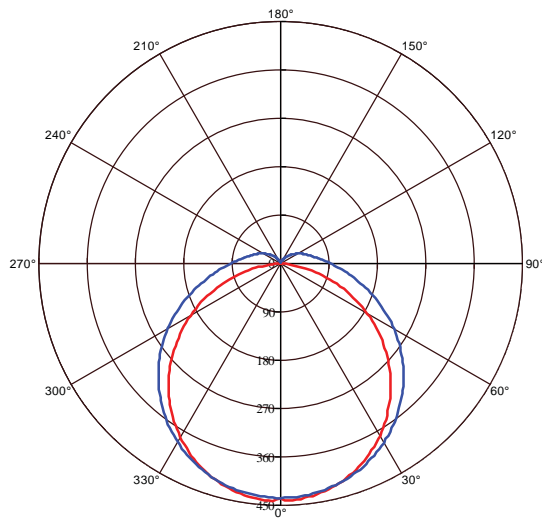

↳ C0 Plane beam angle(50%) ↳ C90 Plane beam angle(50%)

C0 Plane beam angle(50%):110.3(DEG) C90 Plane beam angle(50%):127.5(DEG)

| Technical Data                                  |                    |
|---|--------------------|
| Voltage (V)                                     | 170-265V           |
| Product Wattage (W)                             | 45                 |
| Equivalence with incandescent lamp(W)           | 360                |
| Colour Render Index (Ra)                        | >Ra70              |
| Colour Temperature (K)                          | 6400K              |
| Materials                                       | PC Cover           |
| Protection Class                                | II                 |
| Dimmable  | No                 |
| EEI   | A to A++           |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm)                              | 3600               |
| Luminous Efficacy (lm/W)                        | 80                 |
| Rated Life (hrs) ⌚                              | 30.000             |
| IP Rating                                       | 65                 |
| Power Factor                                    | >0.5               |
| Beam Angle                                      | 120°               |
| Starting Time                                   | <0.2s              |
| Number of ON-OFF cycling                        | x15.000            |

## Applications

- Under shop awnings, car parks, school perimeters, warehouse.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

